(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 16 March 2006 (16.03.2006)

PCT

(10) International Publication Number WO 2006/028324 A1

(51) International Patent Classification⁷:

A47L 15/42

(21) International Application Number:

PCT/KR2005/001545

- (22) International Filing Date: 25 May 2005 (25.05.2005)
- (25) Filing Language:

Korean

(26) Publication Language:

English

(30) Priority Data: 10-2004-0056046

19 July 2004 (19.07.2004) KR

- (71) Applicant (for all designated States except US): LG ELECTRONICS, INC. [KR/KR]; 20 Yoido-dong, Youngdungpo-gu, Seoul 150-875 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HWANG, Gab-Kyu [KR/KR]; 978-6, Jisan1-dong, Susung-gu, Daegu-si 706-091 (KR).
- (74) Agent: HAW, Yong-Noke; 8th Fl. Sonchon Bldg., 642-15, Yoksam-dong, Kangnam-gu, Seoul 135-080 (KR).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title: A NOZZLE STRUCTURE OF DISH WASHER

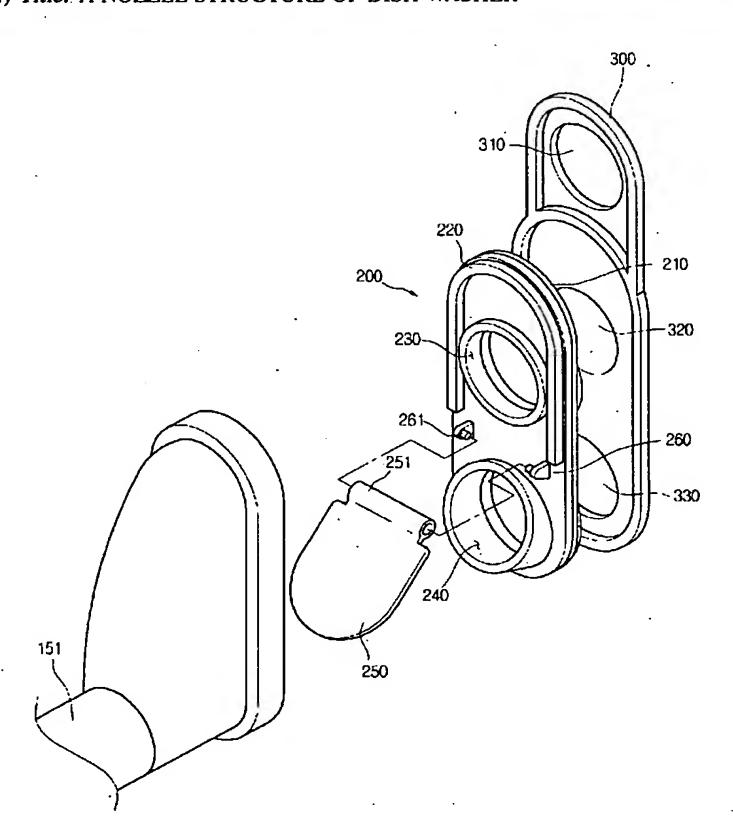

(57) Abstract: A nozzle structure of a dish washer is provided. In the nozzle structure, a nozzle holder is provided, a gasket unit is mounted on an end of the nozzle holder and it includes at least one inlet port, a flap support unit is protruded from a front of the gasket unit, and a check valve flap is rotatably coupled to the flap support unit.

WO 2006/028324 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.